

Introduction

The LogiCORE™ IP GTP Transceiver Wizard automates the task of creating HDL wrappers to configure the high-speed serial GTP transceivers in the Spartan®-6 LXT sub-family.

The menu-driven interface allows one or more GTP transceivers to be configured using pre-defined templates for popular industry standards, or from scratch, to support a wide variety of custom protocols. The Wizard produces a wrapper, an example design, and a test bench for rapid integration and verification of the serial interface with your custom function.

Features

- Creates customized HDL wrappers to configure Spartan-6 family GTP transceivers
- Users can configure Spartan-6 family GTP transceivers to conform to industry standard protocols using predefined templates, or tailor the templates for custom protocols
- Templates include support for the following specifications: CPRI™, DisplayPort, Gigabit Ethernet, HD-SDI, OBSAI, PCI EXPRESS® (PCIe®) generation I, Serial RapidIO, XAUI, Aurora 8B/10B, SATA 1.5 Gbps, and SATA 3 Gbps
- Automatically configures analog settings
- Each custom wrapper includes example design, test bench; and both implementation and simulation scripts

| LogiCORE IP Facts Table | | | | | |
|--|--|-----|------------|------------|------------|
| Core Specifics | | | | | |
| Supported Device Family ⁽¹⁾ | Spartan-6 ⁽²⁾ LXT | | | | |
| Supported User Interfaces | Not Applicable | | | | |
| | Resources | | | | Frequency |
| Configuration | LUTs | FFs | DSP Slices | Block RAMs | Max. Freq. |
| Config1 | Not Applicable | | | | |
| Provided with Core | | | | | |
| Documentation | Product Specification Getting Started Guide | | | | |
| Design Files | Verilog and VHDL | | | | |
| Example Design | Verilog and VHDL | | | | |
| Test Bench | Verilog and VHDL | | | | |
| Constraints File | Synthesis Constraints File | | | | |
| Simulation Model | Verilog and VHDL | | | | |
| Tested Design Tools | | | | | |
| Design Entry Tools | CORE Generator™ tool | | | | |
| Simulation | ISim 12.4 Mentor Graphics ModelSim 6.5c Cadence IES 9.2 Synopsys VCS and VCS MX 2009.12 | | | | |
| Synthesis Tools | XST 12.4 Synopsys Synplify Pro D-2010.03 | | | | |
| Support | | | | | |
| Provided by Xilinx, Inc. | | | | | |


Notes:

1. For a complete listing of supported devices, see the release notes for this core.
2. For more information on the Spartan-6 devices, see the *Spartan-6 Family Overview* [Ref 1]

Functional Overview

Figure 1 outlines the steps required to configure GTP transceivers using the Wizard. Start the CORE Generator™ software and select the GTP Transceiver Wizard, then follow the chart to configure the transceivers and generate a wrapper that includes an accompanying example design.

- If you use an existing template with no changes, click Generate.
- If you are modifying a standard template or starting from scratch, proceed through the Wizard and adjust the settings as needed.

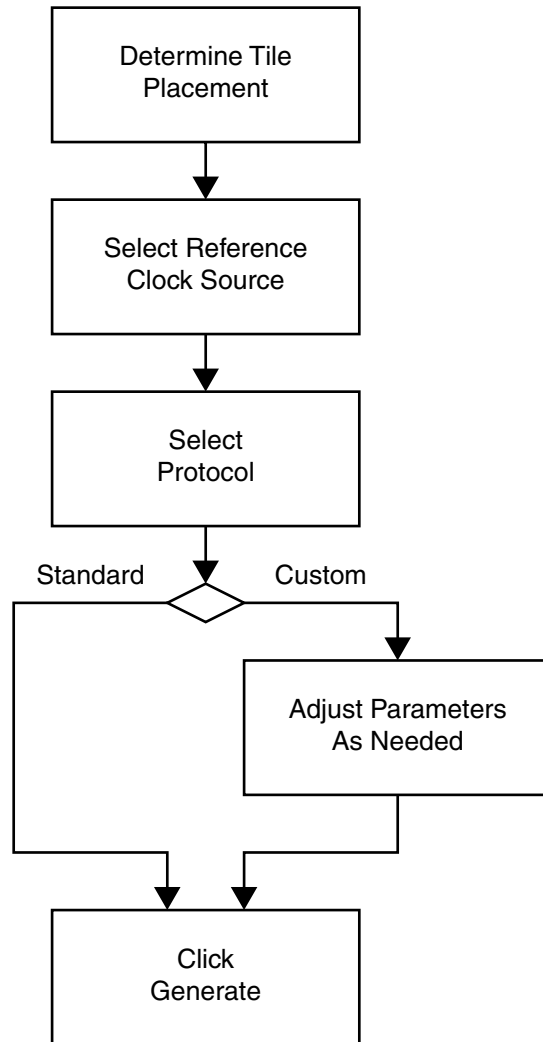


DS713_01_051809

Figure 1: GTP Wizard Configuration Step

See the *Spartan-6 FPGA GTP Transceivers User Guide* [Ref 3] for details on the various transceiver features and parameters available.

Wrapper Overview

Figure 2 shows the block diagram of the wrapper, example design, and test bench produced by the Wizard.

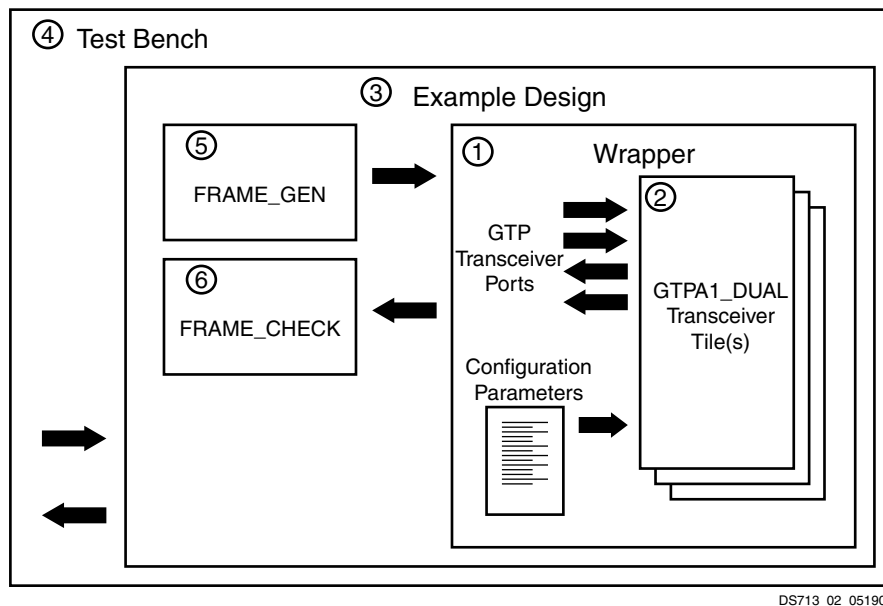

DS713_02_051909

Figure 2: Wrapper Block Diagram

The wrapper comprises six components:

1. Wrapper: The specific GTP transceiver configuration parameters set with the Wizard.
2. GTPA1_DUAL Transceiver Tile(s): Instantiated transceiver pairs selected with the Wizard.
3. Example Design: Temporary top-level design that will be replaced with the actual application.
4. Test Bench: Top-level test bench to aid in simulation of the design.
5. FRAME_GEN Module: Generates a user-definable data stream for simulation analysis.
6. FRAME_CHECK Module: Tests for correct transmission of data stream for simulation analysis.

Support

Xilinx provides technical support for this LogiCORE product when used as described in the product documentation. Xilinx cannot guarantee timing, functionality, or support of product if implemented in devices that are not defined in the documentation, if customized beyond that allowed in the product documentation, or if changes are made to any section of the design labeled DO NOT MODIFY.

Ordering Information

The Spartan-6 FPGA GTP Transceiver Wizard LogiCORE IP core is provided free of charge under the terms of the [Xilinx End User License Agreement](#). The core can be generated by the Xilinx® ISE CORE Generator software, which is a standard component of the Xilinx ISE Design Suite. This version of the core can be generated using the ISE CORE Generator system v12.4. For more information, please visit the [Architecture Wizards web page](#).

Information about additional Xilinx LogiCORE modules is available at the [Xilinx IP Center](#). For pricing and availability of other Xilinx LogiCORE modules and software, please contact your local Xilinx [sales representative](#).

References

1. [DS160](#): *Spartan-6 Family Overview*
2. [UG546](#): *LogiCORE IP Spartan-6 FPGA GTP Transceiver Wizard v1.8 Getting Started Guide* for a general overview of the wrapper creation procedure.
3. [UG386](#): *Spartan-6 FPGA GTP Transceivers User Guide*

Revision History

The following table shows the revision history for this document:

| Date | Version | Revision |
|----------|---------|--|
| 04/24/09 | 1.1 | Initial Xilinx release. |
| 06/24/09 | 1.2 | Wizard v1.2 release. |
| 09/16/09 | 1.3 | Wizard v1.3 release. |
| 12/02/09 | 1.4 | Wizard v1.4 release. |
| 04/19/10 | 1.5 | Wizard v1.5 release. Added support for SATA 3 Gbps. Added Ordering Information . |
| 07/23/10 | 1.6 | Wizard v1.6 release. |
| 09/21/10 | 1.7 | Wizard v1.7 release. |
| 12/14/10 | 1.8 | Wizard v1.8 release. |

Notice of Disclaimer

Xilinx is providing this product documentation, hereinafter "Information," to you "AS IS" with no warranty of any kind, express or implied. Xilinx makes no representation that the Information, or any particular implementation thereof, is free from any claims of infringement. You are responsible for obtaining any rights you may require for any implementation based on the Information. All specifications are subject to change without notice. XILINX EXPRESSLY DISCLAIMS ANY WARRANTY WHATSOEVER WITH RESPECT TO THE ADEQUACY OF THE INFORMATION OR ANY IMPLEMENTATION BASED THEREON, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OR REPRESENTATIONS THAT THIS IMPLEMENTATION IS FREE FROM CLAIMS OF INFRINGEMENT AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Except as stated herein, none of the Information may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx.